


GEO ME TRY

—
E-ROAD

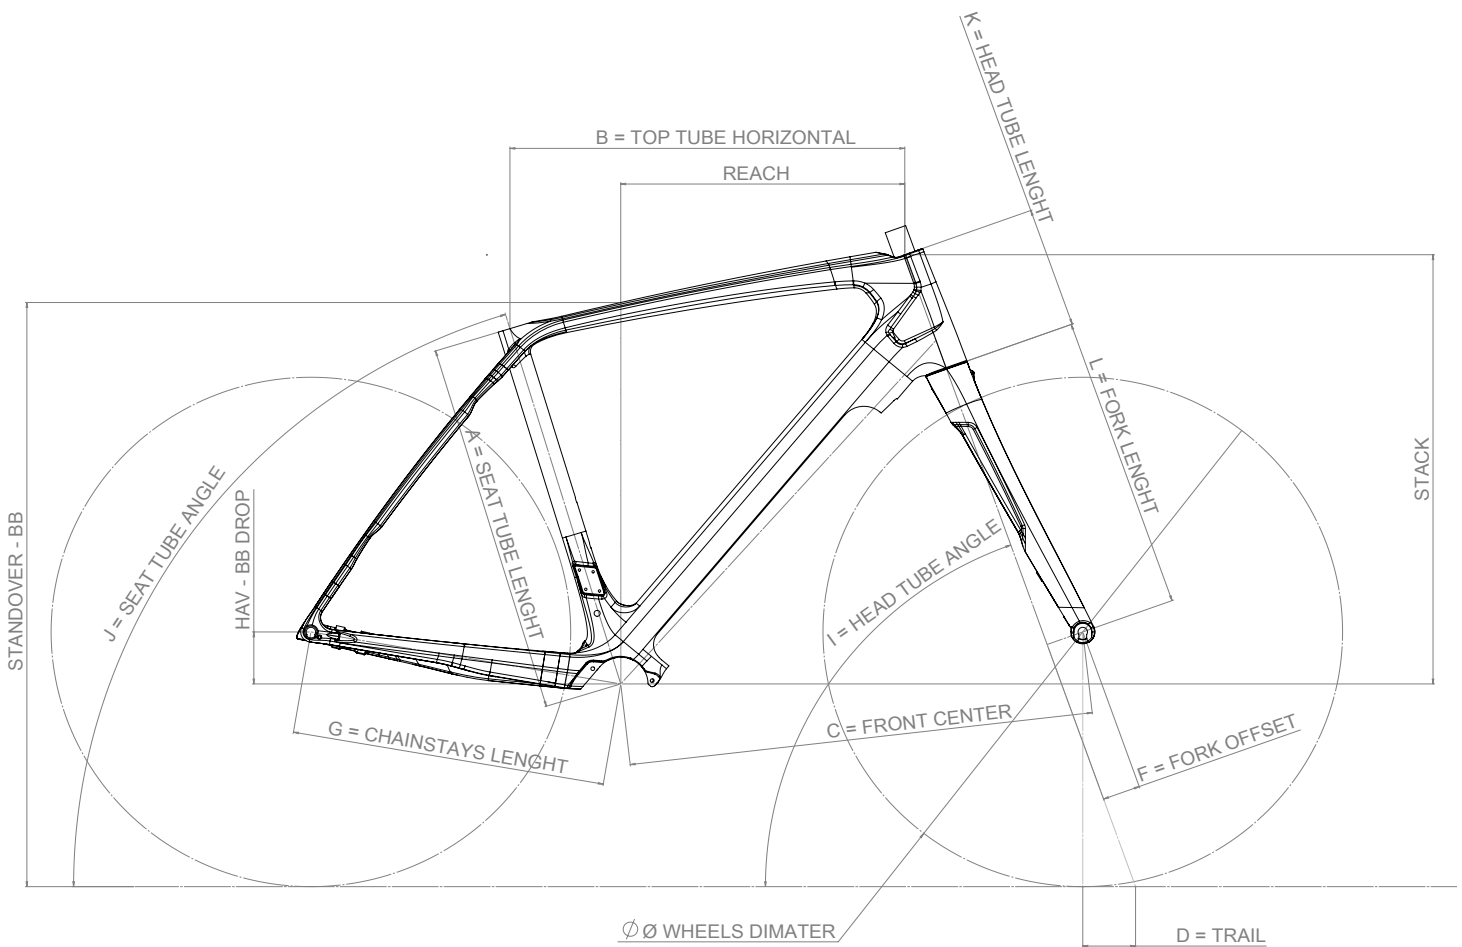

E-765 OPTIMUM GEOMETRY WHEELS DIAMETER IN MM : 690

	Stack (mm)	Reach (mm)	I (°) (mm)	J (°) (mm)	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)	G (mm)	K (mm)	L (mm)	HAV (mm)
XS	530,0	355,0	70,3	74,0	470,0	507,0	577,0	70,0	50,0	415,0	111,5	395,0	70,0
S	554,0	365,0	70,3	74,0	490,0	524,0	595,5	70,0	50,0	415,0	137,0	395,0	70,0
M	578,0	375,0	70,3	73,0	510,0	552,0	614,0	70,0	50,0	415,0	162,5	395,0	70,0
L	602,0	385,0	70,3	73,0	535,0	569,0	632,5	70,0	50,0	415,0	188,0	395,0	70,0
XL	626,0	395,0	70,3	73,0	560,0	586,5	651,0	70,0	50,0	415,0	213,5	395,0	70,0